

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)


PCT

(10) International Publication Number
WO 2004/019745 A1

- (51) International Patent Classification⁷: A47L 5/38 (72) Inventor; and
(21) International Application Number: PCT/FI2003/000638 (75) Inventor/Applicant (for US only): MALINEN, Timo
(FI/FI); Masalantie 357, FIN-02430 Masala (FI).
(22) International Filing Date: 1 September 2003 (01.09.2003) (74) Agent: PAPULA OY; P.O. Box 981, FIN-00101 Helsinki
(FI).
(25) Filing Language: Finnish (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
(26) Publication Language: English
(30) Priority Data: U20020361 2 September 2002 (02.09.2002) FI (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
20021563 2 September 2002 (02.09.2002) FI
(71) Applicant (for all designated States except US): KP-TEKNO OY [FI/FI]; Masalantie 357, FIN-02430 Masala (FI).

[Continued on next page]

(54) Title: CENTRAL VACUUM CLEANER AND ITS CENTRAL UNIT

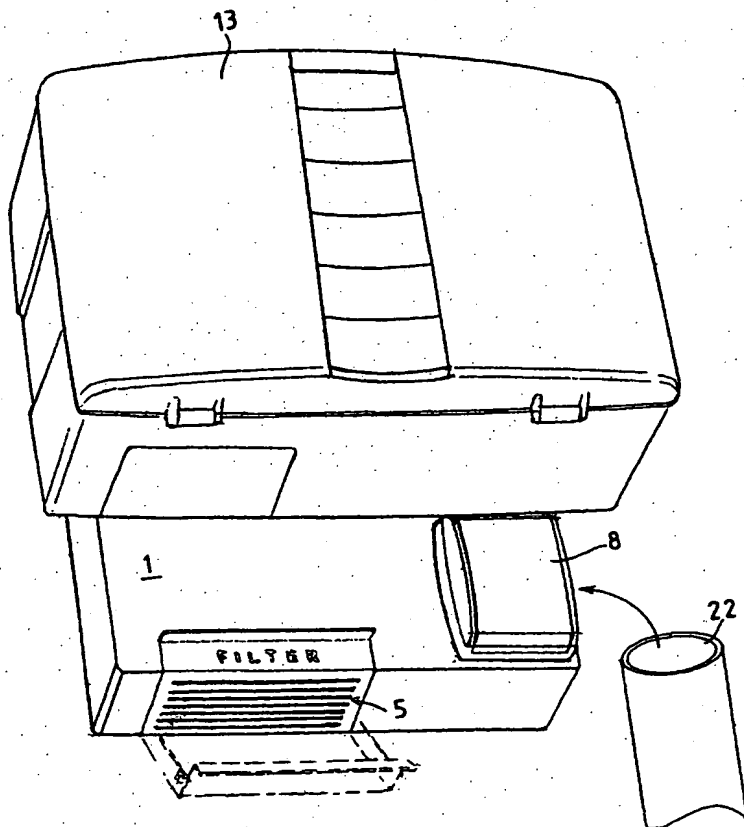

(57) Abstract: A central vacuum cleaner including a central unit provided with a suction joint and an exhaust joint as well as a suction hose. According to the invention, the central vacuum cleaner includes an operating unit (1) having adaptors for attaching the central unit (2) to the operating unit, an exhaust junction (3) for connecting the exhaust joint of the central unit to the operating unit, a filter (4) for filtering the air flow from the exhaust joint and exhaust junction, as well as an outlet port (5) for directing the air flow that travelled through the filter into the air space surrounding the operating unit.